

Your Trusted Partner in Construction

Tile Adhesives. Skimcoats.
Waterproofing. Sealants.



WATERPROOFING

Waterproofing for Walls



Sikalastic® 510 PH RainGuard (Davco® K10 Sovacryl)

Liquid Applied Arylic Membrane

- Ready to use
- Flexible and able to bridge cracks

Coverage:

16 L: 24 sqm using two coats/ 4 L: 8 sqm using two coats

Packaging: 16 L and 4 L Pail

Waterproofing for Roof and Deck



Sikalastic® 530 PH RainGuard Plus (Davco® K10 Premium)

Liquid Applied Polyurethane Elastomeric


- UV resistant
- Rapid curing
- High elongation

Coverage:

20 L: 24 sqm using two coats/ 4 L: 4 sqm using two coats

Packaging: 20 L and 4 L Pail

Waterproofing for Undertile

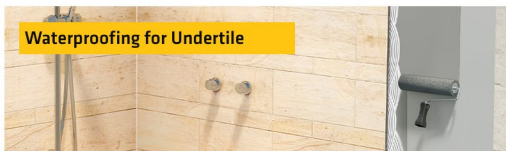

SikaTop® 109 Seal PH (Davco® K11 Flex)

Two-Component Flexible Cementitious Waterproofing

- Flexible
- Watertight
- Micro cracking up to 2mm

Coverage:

2 sqm using two coats

Packaging: 4.5 kg pail

Waterproofing Admixture



Sikalite®

Powdered Waterproofing Admixture for Mortar

- Lessens water absorption
- Helps prevent corrosion and lessen concrete porosity

Powder Mix: 1 pack: 1 bag of cement

Packaging: 800 grams

WATERPROOFING

Waterproofing for Pools



SikaTop® 111 Seal Plus PH (Davco® K11 Superflex)

Two-Component Hydraulic Micro Mortar

- Flexible
- Resistance to micro cracking

Coverage:

34 kg: 11 sqm using two coats

Packaging: 34 kg set (10 L & 23 kg)

Fast Setting Water Plug



Sika® MonoTop® 108 Rapid Plug PH (Davco® 11 Rapid Plug)

Fast-Setting Waterproofing Mortar for Water-Stopping & Cementitious Filler

- Ultra fast setting
- Long term protection against water leakage on plugged area

Coverage:

1.7 kg of powder produces 1 liter of workable mortar

Packaging: 5 kg pail

Below Grade Waterproofing



SikaTop® 105 Seal PH (Davco® K11 Slurry)

Two-Component, Alkali-Reactive (Crystallization Process) Cementitious Waterproofing

- Non-toxic
- Potable water compatible
- Good adhesion to concrete

Coverage:

34 kg: 11 sqm using two coats


Packaging: 34 kg set (9 kg & 25 kg)

'DI DAPAT SA HULI
ANG PAGSI-SIKA

USE SIKA WATERPROOFING PRODUCTS



Creative Visualization

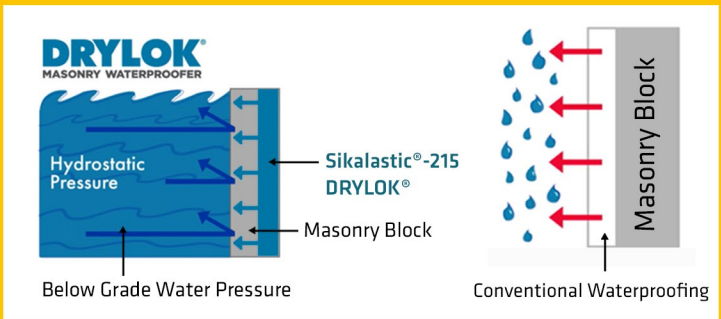

Sikalastic®-215 DRYLOK® is a waterproof coating for concrete and masonry that **helps stop water leaks** by sealing tiny pores and cracks. It creates a smooth, durable finish that resists mildew and can withstand strong water pressure up to 10 meters deep.

Product Advantages:

- Easy to use (one component)
- For negative side waterproofing application
- It can resist 15 PSI water pressure
- Mitigate efflorescence
- Mildew resistant
- Fast cure smooth texture (recoating time 2 hours)
- Can be recoated with latex after 24 hours curing
- Singapore Green Product Label

Tile Adhesives

SikaTile® 300 Tile Adhesive (Davco® Standard Tile Adhesive)

- Basic bond strength (≥ 0.5 MPa)
- Cost effective
- Easy to apply

Use: For bonding ceramic tiles, baked clay tiles, quarry and most monocottura

Packaging: 25 kg bag



SikaTile® 330 Tile Adhesive C1 (Davco® Dustless Regular Tile Adhesive)

- Quality bond strength (≥ 0.5 MPa)
- Cost effective
- Easy to apply

Use: For interior wall and floor tiling, and exterior floor tiling

Packaging: 25 kg bag



SikaTile® 390 Heavy Duty Tile Adhesive C2T (Davco® Dustless Heavy Duty Tile Adhesive)

- High bond strength (≥ 1 MPa)
- Heavy duty performance
- Anti-Slip technology

Use: For low-porosity tiles and heavy-duty interior and exterior applications.

Packaging: 25 kg bag



SikaTile® 480 Premium Tile Adhesive C2TS1 (Davco® Dustless Premium Tile Adhesive)

- Premium bond strength (≥ 1.2 MPa)
- Flexural strength
- Anti-Slip technology
- Water resistance
- Dustless technology

Use: Suitable for porous and non-porous tiles (glass mosaics, glazed glass ceramics, granite, slate and natural stones)

Packaging: 25 kg bag



Tile Adhesives Coverage:

Spread adhesive onto the substrate using:

- 6mm x 6mm notched trowel approx. 3.5 kg per sqm
- 10mm x 10mm notched trowel approx. 5 kg per sqm

BUILDING FINISHING

Wall/ Crack Filler



SikaWall® 720 E Crack Filler

- Ready to use
- Suitable for filling small cracks, potholes, nail holes, minor surface defects

Coverage:
60x60 at 2mm width – 10.5 sqm/cartridge
Packaging: 250 grams

Application thickness: 1 - 2 mm thickness per coat
Not suitable for large structural cracks or gaps exceeds 5mm depth

Two-Component Epoxy Tile Grout



SikaCeram® 850 Design

Two-Component Epoxy Tile Grout Designed for Joints between 1mm to 5mm

- Durable
- Floor and wall application
- Good chemical resistance

Packaging: 420 grams

Coverage:

Tile size	Joint width		
Centimeters	2 mm	2.5 mm	3 mm
5*5	1	0.5	0.25
10*10	2	1.5	1
20*20	3.5	2.5	2
30*60	7.5	5.5	4
60*60	10.5	7.5	5.5
80*80	14	10	7

Cementitious Tile Grout



SikaTile® Grout (Davco® Standard Tile Grout)

- Versatile: can be applied in kitchen, bathrooms and walls
- Easy to use

Coverage:

Tile Size	Thickness (mm)	Joint Width (mm)					
		1	2	3	4	5	6
1" x 1"	4	1.8	0.8	0.6	0.5	0.4	0.3
4" x 4"	5	5.9	2.9	2.0	1.5	1.2	1.0
8" x 8"	5	11.8	5.9	3.9	2.9	2.4	2.0
8" x 10"	5	13.1	6.5	4.4	3.3	2.6	2.2
10" x 12"	5	16.0	8.0	5.3	4.0	3.2	2.7
12" x 12"	10	8.8	4.4	2.9	2.2	1.8	1.5
Packaging:	2 kg pouch						

Standard Colors

White

Gray

Beige

Cream Almond



SikaCeram® Tile Grout

SikaCeram® Tile Grout is an ultra-white, fine grout with excellent moisture and mildew resistance, ideal for 1–5 mm joints in indoor and outdoor tiled areas, including kitchens, bathrooms, and swimming pools.

Product Advatanges:

- Excellent waterproof performance
- Mold-resistant function
- Strong adhesion
- Add water and stir to use

Coverage

Tile Size	Thickness (mm)	Joint Width (mm)					
		1	2	3	4	5	6
1" x 1"	4	1.8	0.8	0.6	0.5	0.4	0.3
4" x 4"	5	5.9	2.9	2.0	1.5	1.2	1.0
8" x 8"	5	11.8	5.9	3.9	2.9	2.4	2.0
8" x 10"	5	13.1	6.5	4.4	3.3	2.6	2.2
10" x 12"	5	16.0	8.0	5.3	4.0	3.2	2.7
12" x 12"	10	8.8	4.4	2.9	2.2	1.8	1.5
Packaging:	2 kg pouch						

Standard colors:

- White
- Vanilla
- Light Gray
- Charcoal

SEALING AND BONDING

Joint Sealants



Sikaflex®-140 Construction

Joint Sealant for Building Joints

- Bubble-free curing
- Good workability
- Good adhesion to many substrates

Packaging:
600 ml



Accessory:
Sika Heavy Duty
Caulking Gun

Multipurpose Adhesive



SikaBond®-124 Instant Nails

High Strength Multipurpose Adhesive

- Easy to apply
- Rapid initial grab after flash off
- Good adhesion to many substrates

Packaging:
333 g cartridge, 12 cartridges per box

Expanding Foam



SikaBoom® AP

Multi-use, High Yield Polyurethane Expanding Foam

- Multi-positioning foam; application in all positions (360°C)
- High expansion rate
- Fast-curing

Packaging: 250 ml

Sealing Tape



Sika® MultiSeal AP

Bituminous Sealing Tape

- Good adhesion to many substrates
- Can be overpainted
- Very easy to apply
- Weather proof

Packaging:
Length per roll: 3 m
Tape width: 100 mm
Rolls per box: 12

BUILDING FINISHING

Paste Type Skimcoat: Ready to mix



SikaWall® 101 Skimcoat Paste (Lanko® 101 PH Parenduit)

Ready-to-Mix Interior & Exterior Wall and Ceiling Skimcoat


- Smooth finish
- Excellent workability
- Can be exposed or covered

Coverage:

25 kg: 16 - 20 sqm/ 20 kg: 12 - 16 sqm/ 5 kg: 3 - 5 sqm

Packaging: 25 kg, 20 kg and 5 kg pail

Paste Type Skimcoat: Ready to use

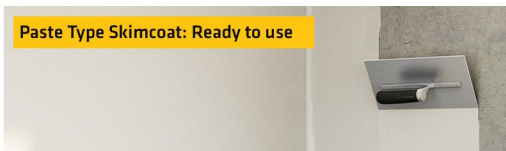

SikaWall® 103 Skimcoat Paste (Lanko® 103 PH Lankowall)

Ready-to-Use Interior & Exterior Wall and Ceiling Skimcoat


- Smooth finish
- Eliminates minor surface blemishes
- Can be used as decorative topcoat
- Can be applied using a spray machine to create a rough, textured surface.

Coverage:

25 kg: 16 - 20 sqm/ 20 kg: 12 - 16 sqm/ 5 kg: 3 - 5 sqm

Packaging: 25 kg, 20 kg and 5 kg pail

Powder Skimcoat (Superfine)

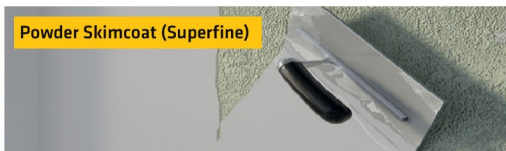

SikaWall® 110 Skimcoat (Lanko® 110 Lankoskim)

Superfine Powder Skimcoat for Interior & Exterior

- Smooth finish
- Excellent workability
- Eliminates minor surface blemishes
- Compatible with decorative wall coverings

Coverage: 20 - 25 sqm

(1 mm thickness, depending on substrate condition)

Packaging: 20 kg bag

Rendering Mortar



SikaWall® 113 Rendering Mortar (Lanko® 113 Lankopatch)

Ready-mix powder for leveling and smoothing uneven wall and ceiling surfaces

- Easy to use
- High bonding strength
- Compatible with decorative wall coverings
- Interior & exterior application


Coverage:

9 - 20 sqm

Packaging: 20 kg bag

REFURBISHMENT

Rigid Bonding

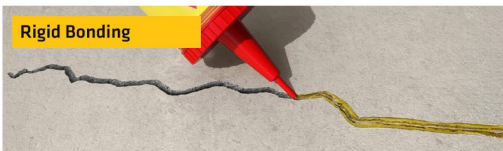

Sikadur®-20 Crack Seal

Low Viscosity and Semi Elastic Epoxy Resin

- Semi elastic crack sealing
- Low viscosity
- Suitable in both, dry and damp conditions

Packaging: 160 ml

Cementitious Grout



SikaGrout® 112 PH

General Purpose Non-Shrink Cementitious Grout

- Easy to use, just add water
- Shrinkage compensated
- Non-corrosive
- Non-toxic

Consumption: ~ 1.851 kg/cubic metre of mortar

Packaging: 25 kg bag

Mortar Admixture



SikaLatex®-751 PH

Mortar Enhancer and Platering Aid

- Excellent adhesion
- Reduced shrinkage
- Excellent water resistance
- Increased abrasion resistance

Coverage: Cement: 1:2-3

Mortar: 1:4-5

Packaging: 4 liter pail

CONCRETE

Mortar Admixture



Sikament® NN Powder

Water-reducing concrete admixture

- Workability is greatly improved
- Decreases the amount of vibration
- Up to 25% water reduction

Coverage: 1 pack: 1 bag cement

Packaging: 150 grams pack